



2010

THE SMART MONEY IS ON



TRUCK TIRE DATA AND REFERENCE BOOK



**TABLE OF
CONTENTS**

2	PRODUCT COMPARISON CHART	10	DRIVE TIRES
4	FUEL EFFICIENT TIRES	12	MIXED SERVICE TIRES
5	STEER TIRES	16	TECHNICAL DATA
9	TRAILER TIRES	17	WARRANTY INFORMATION





We take the responsibility of quality very, very seriously. Our global O.E. positions, and those in North America, reinforce our commitment to quality.


The quality standards of Double Coin are backed by ISO 9001, the TS16949 Certificate of Registration issued by the British Standard Institute for "Quality Management System," as well as the ISO14001 Certificate.

You will discover Double Coin's just as they are known around the world... a tire of uncompromising quality, strength, low cost per mile and retreadability.







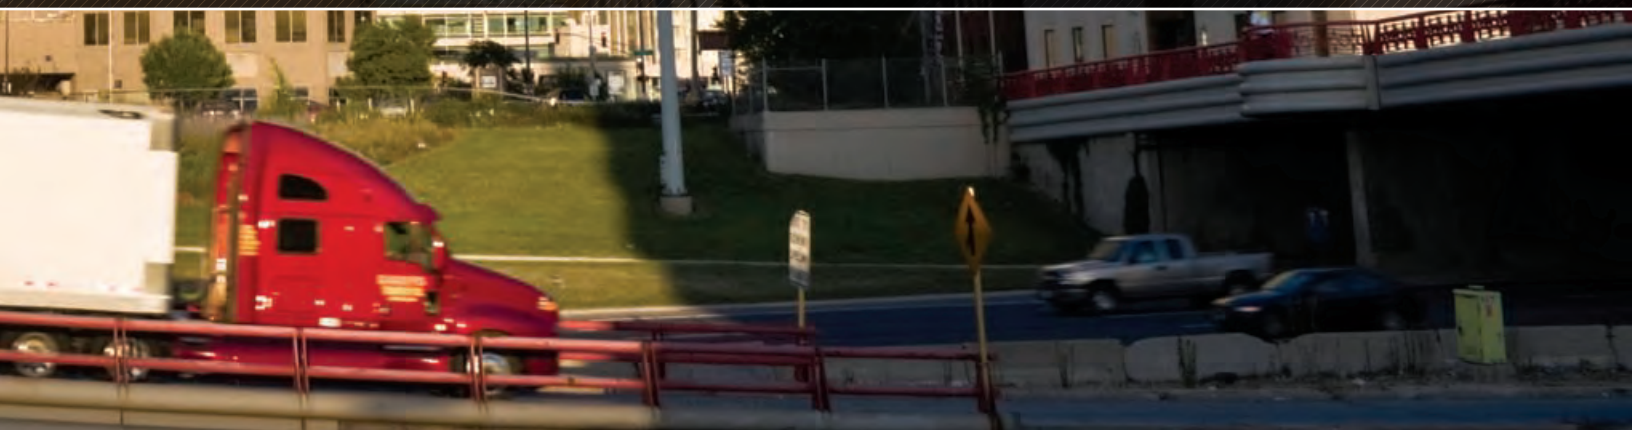





THE SMART MONEY IS ON



**UNCOMPROMISING
QUALITY AND
PERFORMANCE**



PRODUCT COMPARISON CHART

CATEGORY	PAGE	PRODUCT	IMAGE	FEATURES	COMPETITORS	
FUEL EFFICIENT	4	FR605		<ul style="list-style-type: none"> Advanced tread compounds, internal design and construction 5-rib tread design Extensive siping & side-shoulder decoupling groove 	<ul style="list-style-type: none"> Bridgestone R287, R227FE Goodyear G395 LHS Michelin XZA2 Energy, XZA3 	
	4	FD405		<ul style="list-style-type: none"> Advanced tread compounds, internal design and construction Closed-shoulder tread design Deep ²⁶/₃₂" tread 	<ul style="list-style-type: none"> Bridgestone M726EL, M720 Goodyear G305 LHD, G372A LHD Michelin XDA3, XDA – Energy 	
	5	FT105		<ul style="list-style-type: none"> Advanced tread compounds, internal design and construction Extensive tread siping Durable casing 	<ul style="list-style-type: none"> Bridgestone R195F Goodyear G316 LHT Michelin XTA Energy 	
STEER	5	RT606+		<ul style="list-style-type: none"> Enhanced tread compounds & siping Premium 5-rib tread design with wide shoulders Extra deep ²²/₃₂" original tread depth 	<ul style="list-style-type: none"> Bridgestone R260, R250F Goodyear G149 RSA, G169 RSA Hankook AH11, AH12 Continental HSR, HSR-1 Toyo M154, M124Z Firestone FS560 Kuhmo KRS02, KRS03 Michelin XZE2+, XZW2+ 	
	6	RR680		<ul style="list-style-type: none"> Premium 5-rib tread design with wide shoulders Deep ¹⁹/₃₂" original tread depth Enhanced channel siping and wide grooves 	<ul style="list-style-type: none"> Bridgestone R294, R250F Goodyear G149 RSA, G159 Hankook AH08, AH11, AH12 Continental HSR, HSR-1 Toyo M143 Firestone FS507 Kuhmo 955 Michelin XZA1+ 	
	6	RT600		<ul style="list-style-type: none"> Enhanced tread compounds & siping Premium 5-rib tread design with wide shoulders Durable casing promotes long service life 	<ul style="list-style-type: none"> Bridgestone R250F Goodyear G149 RSA Hankook AH11, AH12 Continental HSR, HSR-1 Toyo M143 Firestone FS560 Kuhmo KRS03 Michelin XZE2+, XZE3 	
	7	RR150		<ul style="list-style-type: none"> Premium 5-rib tread design with wide shoulders Deep ¹⁹/₃₂" original tread depth Enhanced channel siping and wide grooves 	<ul style="list-style-type: none"> Bridgestone R294, R250F Goodyear G149 RSA, G159 Michelin XZA1+ Continental HSR, HSR-1 Toyo M143 Firestone FS507 Kuhmo KRS02 	
	7	RR300		<ul style="list-style-type: none"> 5-rib tread design with special compounds Platform rock ejectors Multiple sipes, decoupling grooves 	<ul style="list-style-type: none"> Bridgestone R287 Goodyear G395 LHS Michelin XZA3 Continental HSL Toyo M147, M137 Firestone FS590+ Kuhmo KLS01 	
	8	RR400		<ul style="list-style-type: none"> Premium ¹⁹/₃₂" original tread depth Wide shoulders Durable casing 	<ul style="list-style-type: none"> Bridgestone R250 Goodyear G149 Hankook AH08, AH11 Continental HSR Toyo M154, M137 Firestone T559 Kuhmo 983 Michelin XZY3 	
	8	RR200L		<ul style="list-style-type: none"> Deep ²⁰/₃₂" original tread Abrasion-resistant tread compounds Durable casing 	<ul style="list-style-type: none"> Bridgestone M860 Goodyear G291 Hankook AH12 Continental HSL Toyo M140Z Firestone T559 Kuhmo 955 Kuhmo KRS03 Michelin XZA1+ 	
	TRAILER	9	TR100		<ul style="list-style-type: none"> Optimum tread design Premium ¹⁴/₃₂" tread depth Center rib stone platform ejectors 	<ul style="list-style-type: none"> Bridgestone R195F Goodyear G316 Hankook TL01 Continental HTL Toyo M127 Firestone FT455 Michelin XT-1
		9	RT500		<ul style="list-style-type: none"> Special tread compounds 5-rib design Wide size options for multiple uses 	<ul style="list-style-type: none"> Bridgestone R250F Goodyear G149 RSA, Hankook AH11, AH12 Continental HSR, HSR-1 Toyo M143 Firestone FS560 Kuhmo KRS02, KRS03 Michelin XTA

PRODUCT COMPARISON CHART

	CATEGORY	PAGE	PRODUCT	IMAGE	FEATURES	COMPETITORS
DRIVE		10	RLB400		<ul style="list-style-type: none"> • Closed-shoulder tread design • Extra deep ³⁰/₃₂" tread • Heavy duty casing 	<ul style="list-style-type: none"> • Bridgestone M726 • Goodyear G372 • Hankook DL01 • Continental HDL Eco Plus <ul style="list-style-type: none"> • Toyo M608Z • Firestone FD690+ • Kuhmo KLD01 • Michelin XDA3, XDA5
		10	RLB450		<ul style="list-style-type: none"> • Innovative open shoulder tread design • Deep ²⁶/₃₂" original tread depth • Heavy duty casing 	<ul style="list-style-type: none"> • Bridgestone M711, M725 • Goodyear G362, G182 • Hankook Z35A <ul style="list-style-type: none"> • Continental HDL • Toyo M610ZL • Firestone FD663 • Kuhmo KRD03 • Michelin XD4, XDE M+S
		11	RLB490		<ul style="list-style-type: none"> • Innovative tread design & compounds • Durable casing construction • Multiple low profile options 	<ul style="list-style-type: none"> • Bridgestone M724F • Goodyear G362 • Hankook Z59 • Continental HDR <ul style="list-style-type: none"> • Toyo M627 • Firestone FD690+ • Kuhmo KRD02 • Michelin XDA3, XDA5
		11	RLB1		<ul style="list-style-type: none"> • Open shoulder design; deep ²⁶/₃₂" tread depth • Full-depth siping • Tubeless and tube-type sizes 	<ul style="list-style-type: none"> • Bridgestone M711, M725 • Goodyear G124, G182 • Hankook Z35A • Continental HDL <ul style="list-style-type: none"> • Toyo M610ZL • Firestone FD663 • Kuhmo KRD03, 942 • Michelin XM+S4
		12	RLB200+		<ul style="list-style-type: none"> • Aggressive directional tread pattern • Extra wide tread face 	<ul style="list-style-type: none"> • Bridgestone M711, M725 • Goodyear G124, G182 • Hankook Z35A • Continental HDL <ul style="list-style-type: none"> • Toyo M610ZL • Firestone FD663 • Kuhmo KRD03, 942 • Michelin XM+S4
MIXED SERVICE		12	RR202		<ul style="list-style-type: none"> • 10,000lb load carrying capacity • Modern multi rib tread design • Extra durable casing 	<ul style="list-style-type: none"> • Bridgestone M860 • Goodyear G291 • Hankook AH12 • Continental HSL <ul style="list-style-type: none"> • Toyo M140Z • Firestone T559 • Kuhmo 955 • Michelin XZY3, XZUS
		13	RR99/RR9		<ul style="list-style-type: none"> • Strong all-position tread pattern • Cut, chip and tear resistant tread • 10,000lb load carrying capacity • Tubeless and tube type sizes 	<ul style="list-style-type: none"> • Bridgestone M860, M850 • Goodyear G288 • Hankook AH10 • Continental MS520 <ul style="list-style-type: none"> • Toyo M320 • Firestone T819 • Kuhmo 973 • Michelin XZY3
		13	RLB900+		<ul style="list-style-type: none"> • Aggressive multi-purpose tread design • Large tread elements • Heavy duty belt package and undertread 	<ul style="list-style-type: none"> • Bridgestone M844F • Goodyear G286 • Hankook AM02 • Continental HTC <ul style="list-style-type: none"> • Toyo M320Z • Firestone T839 • Kuhmo 943W • Michelin XZY3, XZUS
		14	RR900		<ul style="list-style-type: none"> • Wide footprint to distribute weight • 6-rib design 	<ul style="list-style-type: none"> • Bridgestone M844F • Goodyear G286 • Hankook AM02 • Continental HTC <ul style="list-style-type: none"> • Toyo M320Z • Firestone T839 • Kuhmo 943W • Michelin XZUS
		14	RLB600		<ul style="list-style-type: none"> • Extra deep ³²/₃₂" tread depth • Chip and cut resistant compounds • Aggressive tread 	<ul style="list-style-type: none"> • Bridgestone M775 • Goodyear G177 • Hankook DM04 • Continental HDO <ul style="list-style-type: none"> • Toyo M506Z • Firestone T831 • Kuhmo 939 • Michelin XZL
		15	RLB800		<ul style="list-style-type: none"> • Chip, cut and abrasion resistant tread • Deep ²⁹/₃₂" tread depth • Aggressive tread 	<ul style="list-style-type: none"> • Bridgestone L317, L320 • Goodyear G177 • Hankook DM04, AM02 • Continental HDO <ul style="list-style-type: none"> • Toyo M503Z • Firestone T819 • Kuhmo 939 • Michelin XDY3

FR605

ULTRA PREMIUM FUEL EFFICIENT STEER POSITION TIRE



FEATURES & BENEFITS

- Advanced tread compounds, design and internal construction provide low rolling resistance and longer mileage
- 5-rib tread design enhances even wear, traction in long haul steer axle positions
- Features extensive siping & side-shoulder decoupling groove to enhance even wear, traction in long haul steer axle positions

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
TBA	11R22.5	14	144/142	M	41.4	11.1	17	8.25	6175lbs/105psi	5840lbs/105psi	19.8	496	113
TBA	11R22.5	16	148/145	M	41.4	11.1	17	8.25	6940lbs/120psi	6395lbs/120psi	19.8	496	117
TBA	295/75R22.5	14	144/141	M	40.6	11.7	17	9.00	6175lbs/110psi	5675lbs/110psi	19.5	504	118
TBA	11R24.5	14	146/143	M	43.3	10.9	17	8.25	6610lbs/105psi	6005lbs/105psi	20.8	473	125
TBA	11R24.5	16	149/146	M	43.3	10.9	17	8.25	7160lbs/120psi	6610lbs/120psi	20.8	473	128
TBA	285/75R24.5	14	144/141	M	41.5	11.0	17	8.25	6175lbs/110psi	5675lbs/110psi	19.5	492	124

FD405

ULTRA PREMIUM FUEL EFFICIENT DRIVE POSITION TIRE



FEATURES & BENEFITS

- Advanced tread compounds and internal construction provide low rolling resistance and longer mileage
- Closed-shoulder tread design provides even wear while maintaining excellent traction
- Deep ²⁶/₃₂" tread with with stone drilling protectors to promote long original mileage

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
TBA	11R22.5	14	143/139	J	42.0	10.9	26	8.25	6040lbs/105psi	5300lbs/95psi	20.1	488	120
TBA	11R22.5	16	148/145	J	42.0	10.9	26	8.25	6610lbs/120psi	5800lbs/110psi	20.1	488	126
TBA	295/75R22.5	14	144/141	J	41.2	11.7	26	9.00	6175lbs/110psi	5675lbs/100psi	19.4	498	119
TBA	11R24.5	14	145/141	J	43.9	10.9	26	8.25	6430lbs/105psi	5640lbs/95psi	21.1	466	135
TBA	11R24.5	16	149/145	J	43.9	10.9	26	8.25	7200lbs/120psi	6320lbs/110psi	21.1	466	138
TBA	285/75R24.5	14	144/141	J	42.1	11.0	26	8.25	6175lbs/110psi	5675lbs/100psi	19.8	485	134

FUEL EFFICIENT

FT105

ULTRA PREMIUM FUEL EFFICIENT TRAILER POSITION TIRE



FEATURES & BENEFITS

- Advanced tread compounds and internal construction provide low rolling resistance and longer mileage
- Extensive tread siping help fight irregular wear in free rolling positions
- Durable casing provides long original tread life and promotes multiple retreads

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
TBA	11R22.5	14	143/139	M	41.0	10.9	12	8.25	6040lbs/105psi	5300lbs/95psi	19.5	500	TBD
TBA	11R22.5	16	148/145	M	41.0	10.9	12	8.25	6610lbs/120psi	5800lbs/110psi	19.5	500	TBD
TBA	295/75R22.5	14	144/141	M	40.2	11.7	12	9.00	6175lbs/110psi	5675lbs/100psi	18.9	510	100
TBA	11R24.5	14	145/141	L	42.9	10.9	12	8.25	6430lbs/105psi	5640lbs/95psi	20.8	476	TBD
TBA	11R24.5	16	149/145	L	42.9	10.9	12	8.25	7200lbs/120psi	6320lbs/110psi	20.8	476	TBD
TBA	285/75R24.5	14	144/141	J	41.1	11.0	12	8.25	6175lbs/110psi	5675lbs/100psi	19.3	505	TBD

STEER

RT606+

ULTRA PREMIUM 5-RIB REGIONAL STEER/ALL-POSITION TIRE



FEATURES & BENEFITS

- Enhanced tread compounds & siping fight irregular wear and provide long life in regional/all-position applications
- Premium 5-rib tread design with wide shoulders enhance durability and even wear
- Extra deep ²²/₃₂" original tread depth allows for longer wear in regional high scrub applications

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1136071255	11R22.5	14	144/142	L	41.6	11.1	22	8.25	6175lbs/105psi	5810lbs/105psi	19.8	496	122
1136071256	11R22.5	16	149/146	L	41.6	11.1	22	8.25	6610lbs/120psi	6005lbs/120psi	19.8	496	125
1136079255	295/75R22.5	14	144/141	L	40.7	11.7	22	9.00	6175lbs/110psi	5675lbs/110psi	19.5	496	129
1136071455	11R24.5	14	146/143	L	43.5	10.9	22	8.25	6610lbs/105psi	6005lbs/105psi	20.8	473	137
1136071456	11R24.5	16	149/146	L	43.5	10.9	22	8.25	7160lbs/120psi	6610lbs/120psi	20.8	473	138
1136078455	285/75R24.5	14	144/141	L	41.5	10.6	22	8.25	6175lbs/110psi	5675lbs/100psi	19.5	492	131

STEER

RR680

PREMIUM REGIONAL/ ALL-POSITION STEER TIRE



FEATURES & BENEFITS

- Premium 5-rib tread design with wide shoulders provide for durability and even wear in steer/all-position applications
- Deep $19/32$ " original tread depth provides long original tread life
- Enhanced channel siping and wide grooves allow for premium wet/dry traction

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133679214	9R22.5	14	136/134	L	38.3	9.1	18	6.75	4940lbs/120psi	4675lbs/120psi	17.9	206	110
1133671255	11R22.5	14	144/142	L	41.4	11.1	20	8.25	6175lbs/105psi	5840lbs/105psi	19.8	499	115
1133671256	11R22.5	16	148/145	L	41.4	11.1	20	8.25	6940lbs/130psi	6350lbs/123psi	19.8	499	118
1133679255	295/75R22.5	14	144/141	M	40.6	11.7	20	9.00	6175lbs/110psi	5675lbs/100psi	19.5	504	118
1133671455	11R24.5	14	145/141	L	43.3	10.9	20	8.25	6430lbs/105psi	5640lbs/95psi	20.8	476	129
1133671456	11R24.5	16	149/145	L	43.3	10.9	20	8.25	7200lbs/120psi	6320lbs/110psi	20.8	476	132
1133678455	285/75R24.5	14	144/141	M	41.5	11.0	20	8.25	6175lbs/110psi	5675lbs/110psi	19.5	492	124
1133679256	295/80R22.5	16	150/148	M	41.3	11.9	18	9.00	7830lbs/120psi	6940lbs/120psi	19.8	191	120
1133671258	315/80R22.5	20	156/150	L	42.4	12.2	18	9.00	8815lbs/125psi	7385lbs/125psi	19.9	188	142

STEER

RT600

PREMIUM LOW PROFILE REGIONAL/ALL-POSITION STEER TIRE



FEATURES & BENEFITS

- Enhanced tread compounds & siping fight irregular wear and provide long life in regional/all-position applications
- Premium 5-rib tread design with wide shoulders provide for durability and even wear
- Durable casing provides long original tread life and promotes multiple retreads

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133702795	225/70R19.5	12	125/123	J	32.3	8.2	16	6.75	3640lbs/95psi	3415lbs/95psi	15.2	635	69
1133704796	245/70R19.5	16	141/140	J	33.3	9.5	16	7.50	5675lbs/125psi	5510lbs/125psi	15.8	610	81
1133706796	265/70R19.5	16	143/141	J	34.3	10.0	16	7.50	6010lbs/125psi	5670lbs/125psi	15.9	606	86
1133709214	9R22.5	14	136/134	L	38.3	9.1	18.3	6.75	4940lbs/120psi	4675lbs/120psi	17.9	206	104
1133700894	8R19.5	12	124/122	J	34.1	8.2	16	6.00	3500lbs/110psi	3070lbs/100psi	16.3	592	68
1133700225	10R22.5	14	141/136	M	40.2	10.0	18	7.50	5670lbs/115psi	4970lbs/105psi	18.9	510	108
1133707726	275/70R22.5	16	148/145	M	37.9	11.0	18	8.25	6930lbs/130psi	6380lbs/130psi	17.7	543	104

STEER

RR150 PREMIUM 5- RIB STEER/ ALL-POSITION MULTI-USE TIRE



FEATURES & BENEFITS

- Premium 5-rib tread design with wide shoulders provide for durability and even wear in steer/all-position applications
- Deep ¹⁹/₃₂" original tread depth provides long original tread life
- Enhanced channel siping and wide grooves allow for premium wet/dry traction

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133281255	11R22.5	14	143/139	M	41.4	11.1	19	8.25	6040lbs/105psi	5300lbs/95psi	19.8	499	115
1133281256	11R22.5	16	148/145	M	41.4	11.1	19	8.25	6610lbs/120psi	5800lbs/110psi	19.8	499	118
1133289255	295/75R22.5	14	144/141	M	40.6	11.7	19	9.00	6175lbs/110psi	5675lbs/100psi	19.5	504	118
1133281455	11R24.5	14	145/141	L	43.3	10.9	19	8.25	6430lbs/105psi	5640lbs/95psi	20.8	476	129
1133281456	11R24.5	16	149/145	L	43.3	10.9	19	8.25	7200lbs/120psi	6320lbs/110psi	20.8	476	132
1133288455	285/75R24.5	14	144/141	M	41.5	11.0	19	8.25	6175lbs/110psi	5675lbs/110psi	19.5	492	124
1133281026	10.00R20	16	148/144	L	41.3	10.7	19	7.50	6610lbs/120psi	5800lbs/110psi	19.4	497	121

STEER

RR300 ULTRA PREMIUM LONG HAUL STEER POSITION TIRE



FEATURES & BENEFITS

- 5-rib tread design with special compounds enhances even wear, traction in long haul steer axle positions
- Platform rock ejectors prevent stone drilling and stone retention to improve casing retreadability and durability
- Features multiple sipes, shoulder decoupling grooves to enhances even wear, traction in long haul steer axle positions

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133291255	11R22.5	14	143/139	M	41.4	11.1	19	8.25	6040lbs/105psi	5300lbs/95psi	19.8	496	113
1133291256	11R22.5	16	148/145	M	41.4	11.1	19	8.25	6610lbs/120psi	5800lbs/110psi	19.8	496	117
1133299255	295/75R22.5	14	144/141	M	40.6	11.7	19	9.00	6175lbs/110psi	5675lbs/100psi	19.5	504	118
1133291455	11R24.5	14	145/141	M	43.3	10.9	19	8.25	6430lbs/105psi	5640lbs/95psi	20.8	473	126
1133291456	11R24.5	16	149/145	M	43.3	10.9	19	8.25	7200lbs/120psi	6320lbs/110psi	20.8	473	129
1133298455	285/75R24.5	14	144/141	M	41.5	11.0	19	8.25	6175lbs/110psi	5675lbs/100psi	19.5	492	123
1133299256	295/80R22.5	16	154/150	M	41.6	12.2	19	9.00	7820lbs/120psi	6610lbs/120psi	20.2	493	120

STEER

RR400 PREMIUM STEER/ALL-POSITION MULTI USE TIRE



FEATURES & BENEFITS

- Premium ¹⁹/₃₂" original tread depth for long mileage
- Wide shoulders to promote even wear and excellent traction
- Durable casing promotes multiple retreads

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133369205	9.00R20	14	141/136	L	40.2	10.1	19	7.00	5670lbs/115psi	4970lbs/105psi	18.9	511	109
1133369206	9.00R20	16	144/139	K	40.2	10.1	19	7.00	6215lbs/130psi	5420lbs/120psi	18.9	511	109
1133360225	10R22.5	14	141/136	M	40.2	10.0	19	7.50	5670lbs/115psi	4970lbs/105psi	18.9	510	108
1133360226	10R22.5	16	144/142	M	40.2	10.0	19	7.50	6170lbs/125psi	5840lbs/125psi	18.9	510	108

STEER

RR200L PREMIUM 5-RIB HIGHWAY SERVICE TIRE



FEATURES & BENEFITS

- Deep ²⁰/₃₂" original tread for optimum use in highway applications
- Abrasion-resistant tread compound to enhance original tread life
- Durable casing promotes multiple retreads

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133311257	315/80R22.5	18	156/152	M	42.5	12.2	20	9.00	8265lbs/115psi	7385lbs/115psi	19.9	485	141
1133311258	315/80R22.5	20	157/154	K	42.5	12.2	20	9.00	9000lbs/130psi	8190lbs/130psi	19.9	485	147

TRAILER

TR100

ULTRA PREMIUM SHALLOW TREAD TRAILER POSITION TIRE



FEATURES & BENEFITS

- Optimum tread design promotes even wear in free rolling/trailer axle positions
- Premium 14/32" tread depth for long original mileage
- Center rib stone platform ejectors preserve casing integrity

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133381255	11R22.5	14	143/139	M	41.0	10.9	14	8.25	6040lbs/105psi	5300lbs/95psi	19.5	500	113
1133381256	11R22.5	16	148/145	M	41.0	10.9	14	8.25	6610lbs/120psi	5800lbs/110psi	19.5	500	116
1133389255	295/75R22.5	14	144/141	M	40.2	11.7	14	9.00	6175lbs/110psi	5675lbs/100psi	18.9	510	114
1133381455	11R24.5	14	145/141	L	42.9	10.9	14	8.25	6430lbs/105psi	5640lbs/95psi	20.8	476	124
1133381456	11R24.5	16	149/145	L	42.9	10.9	14	8.25	7200lbs/120psi	6320lbs/110psi	20.8	476	125
1133388455	285/75R24.5	14	144/141	J	41.1	11.0	14	8.25	6175lbs/110psi	5675lbs/100psi	19.3	505	11

TRAILER

RT500

PREMIUM LOW PROFILE ALL-POSITION MULTI USE TIRE



FEATURES & BENEFITS

- Special tread compounds designed to fight irregular wear and provide long life in trailer/all-position applications
- 5-rib design promotes premium handling and reduced noise
- Four steel belts provide casing strength for excellent durability, toughness and retreadability

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1132598256	8.25R15TR	14	129/127	K	33.2	9.1	16	6.50	4080lbs/120psi	3860lbs/120psi	15.4	627	57
1132598257	8.25R15TR	18	143/141	J	33.2	9.1	16	6.50	6010lbs/125psi	5670lbs/125psi	15.4	627	57
1132591056	10.00R15TR	16	141/139	K	36.3	10.8	16	7.50	5675lbs/115psi	5355lbs/115psi	17.0	570	70
1132591057	10.00R15TR	18	148/145	J	36.3	10.8	16	7.50	6945lbs/125psi	6395lbs/125psi	17.0	570	70
1132697565	7.50R16LT	14	122/118	J	31.7	8.3	16	6.00G	3305lbs/105psi	2910lbs/105psi	14.6	662	56
1133391783	8R17.5	12	122/120	J	30.9	8.2	16	6.00	3305lbs/110psi	3085lbs/110psi	14.3	675	59
1133391706	10R17.5	16	143/141	J	33.9	9.8	16	7.50HC	4675lbs/110psi	4410lbs/110psi	15.8	613	79
1133391776	215/75R17.5	16	135/133	J	30.4	8.5	16	6.00	4805lbs/125psi	4540lbs/125psi	14.0	692	61
1133396795	235/75R17.5	16	143/141	J	31.6	9.2	16	6.75	6010lbs/125psi	5680lbs/125psi	14.7	656	68
1133390894	8R19.5	12	124/122	J	34.1	8.2	16	6.00	3500lbs/110psi	3070lbs/100psi	16.3	592	69
1133392795	225/70R19.5	12	125/123	J	32.3	8.8	16	6.75	3640lbs/95psi	3415lbs/95psi	15.2	635	70
1133394796	245/70R19.5	16	141/140	J	33.2	9.6	16	7.50	5675lbs/125psi	5510lbs/125psi	15.8	610	81
1133396796	265/70R19.5	16	143/141	J	34.3	10.0	16	7.50	6010lbs/125psi	5670lbs/125psi	15.9	606	89
1133395726	255/70R22.5	16	140/137	N	36.6	10.0	16	7.50	5510lbs/115psi	5070lbs/115psi	17.4	560	87
1133397726	275/70R22.5	16	148/145	M	37.8	10.6	16	8.25	6930lbs/130psi	6380lbs/130psi	17.7	543	104

RLB400

ULTRA PREMIUM CLOSED SHOULDER
DEEP TREAD DRIVE POSITION TIRE



FEATURES & BENEFITS

- Closed-shoulder tread design provides even wear while maintaining excellent traction
- Extra deep ³⁰/₃₂" tread with stone drilling protectors to promote long original mileage
- Heavy duty casing for stability and promotion of retreading

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133481255	11R22.5	14	143/139	M	42.0	10.9	30	8.25	6040lbs/105psi	5300lbs/95psi	20.1	488	127
1133481256	11R22.5	16	148/145	M	42.0	10.9	30	8.25	6610lbs/120psi	5800lbs/110psi	20.1	488	130
1133489255	295/75R22.5	14	144/141	J	41.2	11.7	30	9.00	6175lbs/110psi	5675lbs/100psi	19.4	498	129
1133481455	11R24.5	14	145/141	J	43.9	10.9	30	8.25	6430lbs/105psi	5640lbs/95psi	21.1	466	139
1133481456	11R24.5	16	149/145	J	43.9	10.9	30	8.25	7200lbs/120psi	6320lbs/110psi	21.1	466	141
1133488455	285/75R24.5	14	144/141	J	42.1	11.0	30	8.25	6175lbs/110psi	5675lbs/100psi	19.8	485	131

RLB450

ULTRA PREMIUM OPEN SHOULDER
REGIONAL DRIVE POSITION TIRE



FEATURES & BENEFITS

- Innovative open shoulder tread design provides outstanding traction and promotes even wear
- ²⁴/₃₂" original tread depth for excellent mileage in long and short haul applications
- Heavy duty casing for stability and promotion of retreading

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133611255	11R22.5	14	144/142	L	41.9	10.9	25	8.25	6175lbs/105psi	5840lbs/105psi	19.8	493	120
1133611256	11R22.5	16	148/145	L	41.9	10.9	25	8.25	6940lbs/120psi	6395lbs/120psi	19.8	493	125
1133619255	295/75R22.5	14	144/141	J	40.8	11.1	24	9.00	6175lbs/110psi	5675lbs/110psi	19.4	495	128
1133611455	11R24.5	14	143/139	M	41.7	10.9	25	8.25	6430lbs/105psi	5640lbs/95psi	19.8	471	135
1133611456	11R24.5	16	148/145	M	41.7	10.9	25	8.25	7200lbs/120psi	6320lbs/110psi	19.8	471	137
1133618455	285/75R24.5	14	144/141	J	41.9	11.0	24	8.25	6175lbs/110psi	5675lbs/100psi	19.8	485	127
1133611258	315/80R22.5	18	156/150	L	43.2	12.5	29	9.00	8820lbs/120psi	7385lbs/120psi	21.0	480	161

DRIVE

RLB490 PREMIUM LOW PROFILE DRIVE POSITION MULTI USE TIRE



FEATURES & BENEFITS

- Innovative tread design and compounds promote excellent traction and resist irregular wear
- Durable casing construction perfect for tough regional and urban use
- Deep original tread depth provides maximum tread life

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1134902795	225/70R19.5	12	125/123	J	32.6	8.8	19	6.75	3640lbs/95psi	3415lbs/95psi	15.8	635	68
1134904796	245/70R19.5	16	135/133	J	33.5	9.6	19	7.50	4805lbs/120psi	4540lbs/120psi	15.2	617	84
1134906796	265/70R19.5	16	143/141	J	34.6	10.0	22	7.50	6010lbs/125psi	5670lbs/125psi	16.4	615	93
1134905726	255/70R22.5	16	140/137	J	37.0	10.0	22	7.50	5510lbs/115psi	5070lbs/115psi	17.0	597	96
1134907726	275/70R22.5	16	148/145	J	38.1	11.0	22	8.25	6930lbs/130psi	6380lbs/130psi	17.7	543	112

DRIVE

RLB1 PREMIUM OPEN SHOULDER DRIVE POSITION TIRE



FEATURES & BENEFITS

- Open shoulder design provides excellent traction in wet/dry conditions; deep ²⁶/₃₂" tread depth for long original mileage
- Full-depth siping provides excellent performance throughout the life of the tread
- Heavy duty casing for stability and promotion of retreading
- Tubeless and tube-type sizes for special applications

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133419206	9.00R20	16	144/139	J	40.6	10.1	26	7.0	6215lbs/130psi	5420lbs/120psi	19.1	505	119
1133411026	10.00R20	16	148/144	J	41.5	10.7	22	7.5	6610lbs/120psi	5800lbs/110psi	19.4	497	134
1133411206	1100R20	16	149/145	J	43.1	11.2	29	8.0	7200lbs/120psi	6320lbs/110psi	20.2	476	149
1133410225	10R22.5	14	141/139	J	40.2	10.0	22	7.50	5675lbs/115psi	5355lbs/115psi	18.3	512	112
1133411255	11R22.5	14	143/139	M	41.7	10.9	26	8.25	6040lbs/105psi	5300lbs/95psi	19.8	493	124
1133411256	11R22.5	16	148/145	M	41.7	10.9	26	8.25	6610lbs/120psi	5800lbs/110psi	19.8	493	128
1133419255	295/75R22.5	14	144/141	J	40.9	11.7	26	9.00	6175lbs/110psi	5675lbs/100psi	19.4	498	129
1133411455	11R24.5	14	145/141	L	43.7	10.9	26	8.25	6430lbs/105psi	5640lbs/95psi	21.0	471	137
1133411456	11R24.5	16	149/145	L	43.7	10.9	26	8.25	7200lbs/120psi	6320lbs/110psi	21.0	471	140
1133418455	285/75R24.5	14	144/141	J	41.9	11.0	26	8.25	6175lbs/110psi	5675lbs/100psi	19.8	485	134

DRIVE

RLB200+

PREMIUM ON/OFF HIGHWAY
DRIVE POSITION TIRE



FEATURES & BENEFITS

- Aggressive directional tread pattern for improved traction, handling
- Extra wide tread for enhanced tread life and handling

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133731257	315/80R22.5	18	156/152	L	42.8	12.2	26	9.00	8265lbs/115psi	7385lbs/115psi	20.2	478	160
1133732247	12.00R24	18	158/155	J	48.4	12.3	24	8.50	9370lbs/120psi	8540lbs/120psi	22.7	423	187
1133732256	12R22.5	16	152/148	J	43.1	11.7	26	9.00	7825lbs/120psi	6945lbs/120psi	20.5	480	156

MIXED SERVICE

RR202

ULTRA PREMIUM 5-RIB
HIGHWAY SERVICE TIRE



FEATURES & BENEFITS

- 10,000lb load carrying capacity for heavy load applications
- Modern multi rib tread design excellent for free rolling applications
- Durable casing provides long original tread life and promotes multiple retreads

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133669256	295/80R22.5	16	154/150	M	41.3	11.9	19	9.00	7820lbs/120psi	6940lbs/120psi	19.8	191	131
1133661258	315/80R22.5	20	157/154	K	42.4	12.2	20	9.00	9000lbs/130psi	8190lbs/130psi	19.9	483	142
1133661259	315/80R22.5	22	160/157	65MPH	42.4	12.2	20	9.00	10000lbs/130psi	9090lbs/130psi	19.9	483	147

MIXED SERVICE

RR99/RR9

PREMIUM ON/OFF HIGHWAY MIXED SERVICE ALL-POSITION TIRE



FEATURES & BENEFITS

- Strong all-position tread pattern designed for multiple on/off highway uses
- Cut, chip and tear resistant tread compounds and heavy duty casing construction for excellent performance in tough applications
- 10,000lb load carrying capacity for heavy load applications

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133991256	11R22.5	16	148/145	M	41.3	10.9	19	8.25	6610lbs/120psi	5800lbs/110psi	19.5	496	123
1133991456	11R24.5	16	149/146	L	43.4	10.9	21	8.25	7160lbs/120psi	6610lbs/120psi	21.0	484	131
1133992256	12R22.5	16	152/148	L	42.7	11.8	21	9.00	7830lbs/120psi	6940lbs/120psi	20.1	516	134
1133993227	13R22.5	18	154/150	M	43.9	12.2	20	9.75	8267lbs/120psi	7385lbs/120psi	20.7	465	164
1133991258	315/80R22.5	20	156/150	K	42.4	12.2	19	9.00	8820lbs/125psi	7830lbs/120psi	19.9	483	147
1133991259	315/80R22.5	22	160/157	65MPH	42.4	12.2	20	9.00	10000lbs/130psi	9090lbs/130psi	19.9	483	147
1133439205	9.00R20	14	141/136	L	40.2	10.1	19	7.00	5670lbs/115psi	4970lbs/105psi	18.9	510	110
1133431026	10.00R20	16	148/144	L	41.3	10.7	20	7.50	6610lbs/120psi	5800lbs/110psi	19.4	497	140
1133431206	11.00R20	16	149/145	L	42.7	11.1	20	8.00	7200lbs/120psi	6320lbs/110psi	20.1	478	155
1133432207	12.00R20	18	154/149	L	44.0	11.7	20	8.50	8210lbs/120psi	7200lbs/110psi	20.6	466	164

MIXED SERVICE

RLB900+

ULTRA PREMIUM WIDE BASE MIXED SERVICE ALL-POSITION TIRE



FEATURES & BENEFITS

- Aggressive multi-purpose tread design ideal for on/off highway applications
- Large tread elements offer improved handling and excellent traction
- Heavy duty belt package and undertread offer increased durability, uniform wear and stability

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133648257	385/65R22.5	18	160/158	K/L	42.2	14.8	22	11.75	9910lbs/130psi	N/A	20.1	483	164
1133642258	425/65R22.5	20	165	K	44.6	16.3	22	13.00	11350lbs/120psi	N/A	21.2	458	205
1133642548	445/65R22.5	20	168	J	45.3	17.9	22	14.00	12300lbs/120psi	N/A	20.9	457	229

RR900 PREMIUM WIDE BASE ALL-POSITION TIRE



FEATURES & BENEFITS

- Tread pattern/heavy ply rating designed for multiple uses
- 6-rib design excellent for free rolling applications
- Durable casing provides long original tread life and promotes multiple retreads

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133378257	385/65R22.5	18	160/158	K/L	42	14.8	20	11.75	9910lbs/130psi	N/A	20.1	486	164

RLB600 PREMIUM EXTRA DEEP TREAD ON/ OFF HIGHWAY SEVERE SERVICE DRIVE POSITION TIRE



FEATURES & BENEFITS

- Extra deep ³²/₃₂" tread depth for on and off road applications
- Chip and cut resistant compounds offer long mileage and wear while reducing effect of cuts, snags and tears
- Aggressive tread offers excellent traction for severe off highway use; no on-highway speed restriction

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133491256	11R22.5	16	146/143	G	43	11.1	33	8.25	6610lbs/120psi	6005lbs/120psi	20.6	478	139
1133491456	11R24.5	16	149/146	G	44	11.1	33	8.25	7160lbs/120psi	6610lbs/120psi	21.6	455	152

RLB800

PREMIUM DEEP TREAD ON/OFF HIGHWAY SEVERE SERVICE DRIVE POSITION TIRE



FEATURES & BENEFITS

- Chip, cut and abrasion resistant tread compounds
- Deep ²⁹/₃₂" tread depth promotes increased mileage and long service life
- Aggressive tread offers excellent traction for severe off highway use; no on-highway speed restrictions

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	OVERALL DIAMETER (INCH)	SECTION WIDTH (INCH)	TREAD DEPTH (32NDS)	RIM	SINGLE MAX/LOAD PRESSURE	DUAL MAX/LOAD PRESSURE	STATIC LOAD RADIUS	REVS PER MILE	WEIGHT
1133501026	10.00R20	16	148/144	G	41.9	10.7	29	7.50	6610lbs/120psi	5800lbs/110psi	19.7	489	130
1133501256	11R22.5	16	148/145	G	41.9	10.9	29	8.25	6610lbs/120psi	5800lbs/110psi	20.0	491	132
1133501456	11R24.5	16	149/145	G	43.9	10.9	29	8.25	7200lbs/120psi	6320lbs/110psi	21.0	468	141
1133502250	12.00R24 (NHS)	18	158/155	J	48.4	12.3	30	8.50	9370lbs/120psi	8540lbs/120psi	22.7	423	221


TECHNICAL DATA

LOAD INDEX & EQUIVALENT LOADS

LOAD INDEX	LOAD (LBS)*	LOAD INDEX	LOAD (LBS)*	LOAD INDEX	LOAD (LBS)*	LOAD INDEX	LOAD (LBS)
74	827	98	1653	122	3307	146	6614
75	853	99	1709	123	3417	147	6779
76	882	100	1764	124	3527	148	6944
77	908	101	1819	125	3638	149	7165
78	937	102	1874	126	3748	150	7385
79	963	103	1929	127	3858	151	7605
80	992	104	1984	128	3968	152	7827
81	1019	105	2039	129	4079	153	8047
82	1047	106	2094	130	4189	154	8268
83	1074	107	2149	131	4299	155	8543
84	1102	108	2205	132	4409	156	8819
85	1135	109	2271	133	4541	157	9094
86	1168	110	2337	134	4674	158	9370
87	1201	111	2403	135	4806	159	9645
88	1235	112	2469	136	4938	160	9921
89	1279	113	2535	137	5071	161	10196
90	1323	114	2601	138	5203	162	10472
91	1356	115	2679	139	5357	163	10748
92	1389	116	2756	140	5512	164	11023
93	1433	117	2833	141	5677	165	11255
94	1477	118	2910	142	5842	166	11684
95	1521	119	2998	143	6008	167	12015
96	1565	120	3088	144	6173	168	12346
97	1609	121	3197	145	6393	169	12787

*One pound is equal to .4536 kg.

TRUCK TIRE DIMENSIONS

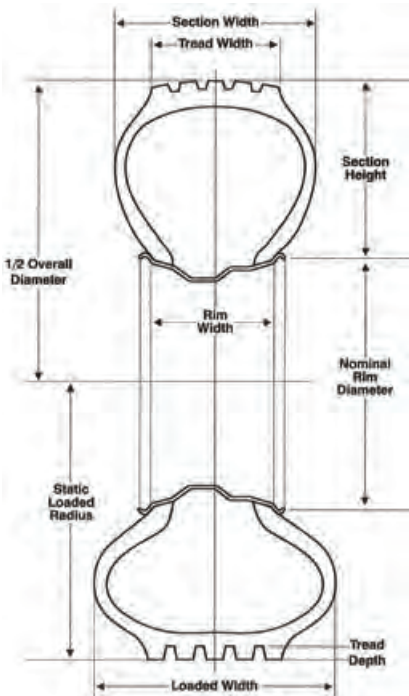

Aspect Ratio = Section Height ÷ Section Width

NOTE: All dimensions measured following a 24-hour inflation period.

Overall Diameter

The measurement of the distance of an unladen tire from tread surface to tread surface on opposite sides of the tire.

Section Width

Measurement of the cross section of an unladen tire across the casing only; not including ribs or protrusions.

Tread Width

Distance across the tread face of an unladen tire.

Tread Depth

Distance from tread surface to major groove base at designated measuring point.

Section Height

Distance from the bead seat to the tread surface of an unladen tire.

Rim Width

Distance between the rim flanges.

Nominal Rim Diameter

Diameter of the rim from bead seat to bead seat in inches.

Static Loaded Radius

Distance from the center of the axle to the ground of a loaded tire under maximum dual load and inflation as stamped on the sidewall of the tire.

Revolutions Per Mile (RPM)

The number of tire revolutions in one mile, measured at 55 mph maximum dual load and inflation (as stamped on the tire's sidewall).

MAXIMUM LOAD & INFLATION TABLE

TIRE SIZE	PLY RATING	LOAD CAPACITY	MAX INFLATION	LOAD CAPACITY	MAX INFLATION
215/75R17.5	16(H)	4805	125	4540	125
8R19.5	12(F)	3500	110	3070	100
225/70R19.5	12(F)	3640	95	3415	95
245/70R19.5*	16(H)	5675	125	5510	125
265/75R19.5	16(H)	6010	125	5670	125
9.00R20	14(G)	5670	115	4970	105
9.00R20	16(H)	6215	130	5420	120
10.00R20	14(G)	6040	105	5300	95
10.00R20	16(H)	6610	120	5800	110
11.00R20	16(H)	7200	120	6320	110
12.00R20	18(J)	8210	120	7200	110
10R22.5*	14(G)	5670	115	4970	105
11R22.5*	14(G)	6040	105	5300	95
11R22.5*	16(H)	6610	120	5800	110
12R22.5*	16(H)	7200	120	6320	110
13R22.5	18(J)	8267	123	7385	123
255/70R22.5	16(H)	5510	115	5070	115
275/70R22.5	16(H)	6930	131	6380	131
295/75R22.5	14(G)	6175	110	5675	110
295/80R22.5	16(H)	7830	120	6940	120
315/80R22.5	18(J)	8265	115	7385	115
315/80R22.5*	20(K)	9000	130	8190	130
315/80R22.5	22(65MPH)	10000	130	9090	130
385/65R22.5	18(J)	9910	130	N/A	N/A
425/65R22.5	20(L)	11350	120	N/A	N/A
445/65R22.5	20(L)	12300	120	N/A	N/A
12.00R24	18(J)	9370	120	8540	110
12.00R24	20(L)	9920	120	8820	120
11R24.5*	14(G)	6430	105	5640	95
11R24.5*	16(H)	7200	120	6320	110
285/75R24.5	14(G)	6175	110	5675	100
10R17.5	16(H)	4675	110	4410	110
235/75R17.5	16(H)	6010	125	5680	125

*Denotes certain patterns with different max load/max pressure values. Check data book for exact amounts.

SPEED SYMBOLS

SPEED SYMBOL	SPEED (KM/H)	SPEED (MPH)	SPEED SYMBOL	SPEED (KM/H)	SPEED (MPH)
A1	5	3	K	110	68
A2	10	6	L	120	75
A3	15	9	M	130	81
A4	20	12	N	140	87
A5	25	16	P	150	94
A6	30	19	Q	160	100
A7	35	22	R	170	106
A8	40	25	S	180	112
B	50	31	T	190	118
C	60	37	U	200	124
D	65	40	H	210	130
E	70	43	V	240	149
F	80	50	W	270	168
G	90	56	Y	300	186
J	100	62		Above 300	Above 186



LIMITED MANUFACTURER'S WARRANTY

LIMITED WARRANTY

Double Coin Radial TBR (Truck and Bus Radial) Tire Limited Manufacturers Warranty
January 1, 2007

TO OBTAIN AN ADJUSTMENT

- A. You must present the tire to be adjusted to a current Double Coin Commercial TBR Tire Dealer. (Please consult your telephone directory for locations or visit our dealer locator on our website at www.doublecoin-us.com). Tires replaced on an adjustment basis become the property of Double Coin.
- B. You must pay for taxes, fees or any additional services you order at the time of adjustment.
- C. No claim will be recognized unless submitted on a Double Coin claim form (supplied by the Double Coin Commercial TBR Tire Dealer), completely filled out and signed by you, the owner of the tire presented for adjustment, or your authorized agent.

FOR SERVICE ASSISTANCE OR INFORMATION

1. First contact the nearest Authorized Double Coin Commercial TBR Tire Dealer.
2. If additional assistance is required:
 - Visit our website at www.doublecoin-us.com.
 - E-mail The Double Coin Customer Relations Department at info@doublecoin-us.com or
 - Write to:

Double Coin Customer Assistance Service Department
406 E. Huntington Drive
Suite 200
Monrovia, CA 91016

WHO IS ELIGIBLE FOR WARRANTY COVERAGE

- You are eligible for the benefits of this warranty if you meet all the following criteria: You are the owner or authorized agent of the owner of new Double Coin Light Truck Radial or radial medium TBR tires.
- Your tires bear Department of Transportation (DOT) prescribed tire identification numbers and are not branded "NA" (Not Adjustable).
- Your Double Coin TBR tires have been used only on the vehicle on which they were originally installed according to the vehicle manufacturers or Double Coin's recommendations.
- Your tires were purchased on or after January 1, 2007.

WHAT IS COVERED UNDER THIS WARRANTY AND FOR HOW LONG

1. 50% FREE REPLACEMENT WARRANTY

If any Double Coin TBR tire covered by this warranty becomes unserviceable due to a defect in workmanship or material during the first 50% of the original tread life (calculated by subtracting one-half (1/2) the difference between the original new tire tread depth and 2/32" from the original new tire tread depth), then Double Coin will reimburse the cost of a replacement Double Coin TBR tire to you, plus the cost of mounting and balancing as follows:

- a. The defective Double Coin tire must be replaced with a comparable new Double Coin tire by an authorized Double Coin TBR tire dealer.
- b. Costs of mounting and balancing will be refunded up to a maximum of \$16.00 per tire.
- c. Applicable taxes and fees will be the responsibility of the owner of the vehicle.
- d. 50% free replacement applies to first quality tires only. Blemished, Non-Adjustable (stamped on tire), retreads or road hazard tires are specifically excluded.

2. PRORATED TIRE REPLACEMENT

Double Coin TBR tires covered by this warranty that become unserviceable due to a defect in workmanship or material during the life of the original usable tread (down to 2/32 remaining usable tread), will be reimbursed to the owner on a prorated basis. You pay only for the mounting, balancing, taxes and fees.

HOW TO CALCULATE THE PRORATED AMOUNT

The replacement price will be calculated by multiplying the current Double Coin "predetermined price for adjustment"

or current advertised selling price at the adjustment location (whichever is lower) by the percentage of usable original tread that has been worn off at the time of adjustment. You pay for mounting, balancing, and amount equal to the full current Federal Excise Tax and any other applicable taxes and fees for the comparable new Double Coin replacement tire.

PRORATED REIMBURSEMENT EXAMPLE

If your disabled tire had an original 16/32" of usable tread depth and is worn to 8/32" of usable tread remaining you have used 50% and therefore must pay 50% of the predetermined price for adjustment or advertised selling price of a comparable tire, plus an amount equal to the full current Federal Excise Tax applicable to the comparable new replacement tire at the time of adjustment. If the price of the comparable tire is \$400.00, the cost to you would be \$200.00 plus Federal Excise Tax, mounting, balancing and any other applicable taxes.

DEFINITION OF A COMPARABLE TIRE

A "comparable" new Double Coin tire may either be the same line of tire or, in the event that the same tire is not available, a tire of the same basic construction and quality with a different sidewall or tread configuration. If a higher priced tire is accepted as replacement, the difference in price will be at an additional charge to you. Any replacement tire provided pursuant to this warranty will be covered by the Double Coin warranty in effect at the time of replacement.

WHAT THIS WARRANTY DOES NOT COVER

Irregular wear or tire damage due to:

- Road hazards (including punctures, cuts, snags, impact breaks, etc.)
- Wreck, collision, or fire.
- Improper inflation, overloading, high speed spinup, misapplication, misuse, negligence, racing, chain damage, or improper mounting or demounting.
- Mechanical condition of the vehicle.
- Ride disturbance after the first 2/32" treadwear or due to damaged wheels or any vehicle condition.
- Any tire intentionally altered after leaving a factory producing Double Coin tires to change its appearance (example: white inlay on a black tire).
- Tires with weather cracking which were purchased more than five (5) years prior to presentation for adjustment. If you have no proof of purchase date, tires manufactured five (5) or more years prior to presentation are not covered.
- This limited warranty is applicable only in the United States and Canada and any tire used or equipped on a vehicle registered or operated outside the U.S. and Canada are not covered by this warranty.
- Tire branded or marked "Non-Adjustable (N/A) or "Blemished" (Blem)", or previously adjusted.
- Failure, damage, or irregular wear due to:
 - Accident or vandalism, improper misalignment, wheel imbalance, faulty shocks or brakes;
 - Mechanical condition of vehicle, including misalignment, wheel imbalance, faulty shocks or brakes;
 - Misapplication of tire, use of improper inner tube;
 - Alteration of the tire or addition of alien material or transfer from one vehicle to another;
 - TBR tire failed due to faulty retreading or material.
- Cost of mounting and balancing service except as noted above.
- Loss of time or use, inconvenience, or any incidental or consequential damages.
- Material added to a tire after leaving a factory producing Double Coin tires: (example: tire fillers, sealants, or balancing substances). If the added material is the cause of the tire being removed from service, the tire will not be adjusted.
- Loss of time, inconvenience, loss of use of vehicle, incidental or consequential damage.

THE DOUBLE COIN RADIAL CASING PROVISION

TBR Tire Casings will be warranted against defects in workmanship or material through 100% of the first & second retread for a period of five (5) years from the date

of the casings DOT serial number or proof of purchase, if available, whichever comes first. If a Double Coin TBR tire dealer examines a casing and finds such a defect, Double Coin will reimburse the owner for the casing according to the following schedule:

DOUBLE COIN CASING VALUES DOUBLE COIN LIGHT TBR	CASING VALUES (Double Coin)
8, 8.5R17.5	\$15.00
8R19.5	\$15.00
TUBELESS	
9, 10, 11R17.5	\$20.00
9, 10R22.5	\$40.00
11R22.5, 24.5	\$65.00, \$70.00
12R22.5, 24.5	\$70.00
TUBELESS LOW PROFILE	
215, 235/75R17.5	\$15.00
225, 245, 265	\$30.00
245, 265/75R22.5	\$15.00
255, 275/70R22.5	\$65.00
295/75R22.5	\$65.00
295/80R22.5	\$65.00
285/75R24.5	\$75.00
315/80R22.5	\$65.00
385, 425, 445/65R22.5	\$65.00
TUBE TYPE	
10.00R20	\$50.00

YOUR LEGAL RIGHTS

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply to you. No representative or dealer has authority to make any representation, promise, or agreement on behalf of Double Coin, except as stated herein. Any tire, no matter how well constructed, may fail in service or otherwise become unserviceable due to conditions beyond the control of the manufacturer. Under no circumstances is this a representation that a tire failure cannot occur. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state. This limited warranty is applicable only in the United States.

END OF WARRANTY

A tire has delivered its full original tread life and the new tire coverage of this warranty ends when the treadwear indicators become visible, or five (5) years from the date of original tire manufacture or new tire purchase date. (Without proof of purchase, date of manufacture will be used to determine age.) Casings may continue to be warranted beyond the new tire coverage. Please refer to the Radial Casing Provision for warranty details on casings.

SAFETY WARNINGS

Serious injury or property damage may result from:

- TIRE FAILURE DUE TO UNDERINFLATION/ OVERLOADING. Follow the owner's manual or tire placard in vehicle.
- TIRE FAILURE DUE TO EXCESSIVE HIGH SPEED. Follow the owner's manual or tire placard in vehicle.
- EXPLOSION OF TIRE/RIM ASSEMBLY DUE TO IMPROPER MOUNTING. Only specially trained persons should mount tires.
- FAILURE TO MOUNT RADIAL TIRES ON APPROVED RIMS
- FAILURE TO DEFLATE SINGLE OR DUAL ASSEMBLIES COMPLETELY BEFORE DISMOUNTING.
- TIRE SPINNING. On slippery surfaces such as snow, mud, ice, etc., do not spin tires in excess of 35 mph (55 kpm), as indicated on the speedometer. Personal injury and severe damage may result from excessive wheel spinning, including tire disintegration or axle failure.

DOUBLE COIN

406 E. Huntington Drive, Suite 200
Monrovia, CA 91016
1-888-226-5250
www.doublecoin-us.com

2010

THE SMART MONEY IS ON



406 E. Huntington Drive, Suite 200
Monrovia, CA 91016
1-888-226-5250
www.doublecoin-us.com